




# Scotch® ATG Adhesive Systems

## Finger touch application of pressure sensitive adhesive

Versatility, convenience and speed. That's what you get with the Scotch® ATG Adhesive System for assembly operations in businesses ranging from appliance and printing to P.O.P. and electronics. Readily bond, join, mount, or laminate materials such as paper, plastics, metal, foam and more.

With Scotch® ATG Adhesive Applicators, a touch of the finger triggers a quick, controlled application of Scotch® ATG Tape at the same time as the liner rewinds into the applicator. There is no mess and no cleanup. 3M advanced acrylic adhesive bonds on contact and is formulated with a choice of properties such as high temperature resistance, differential tack, adhesion to low surface energy plastic, and more.

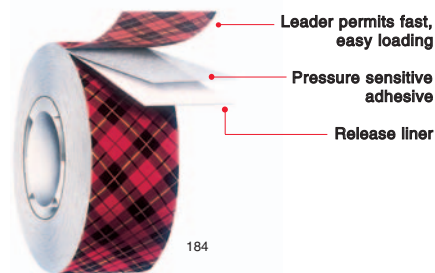

181 Save time and effort with the Scotch® ATG Adhesive System. You apply a precise strip of adhesive at the same time as the liner rewinds into the applicator.



182 Scotch® ATG 700 Applicator with Scotch® ATG Tape 924 makes fast work of folder assembly. Pressure sensitive adhesive bonds immediately and the folder pocket is ready to hold contents.



183 High performance Scotch® ATG Tape 926 bonds foam cushioning inside a portable power tool carrying case.



- 1 Scotch® ATG Applicator 700 for 3/4", 1/2", and 1/4" wide tape (1/4" adapter purchased separately).
- 2 Scotch® ATG Applicator 714 for 1/4" wide tape.
- 3 Scotch® ATG Applicator 752 for 3/4", 1/2", and 1/4" wide tape (1/4" adapter purchased separately).
- 4 Scotch® ATG Applicator 3662 for 2" wide tape.

## Product Information: Scotch® ATG Adhesive Systems

Adhesive Type	Product Number	Tape Thickness w/o liner Mil (mm)	Description	Temperature Resistance		Solvent Resistance	Relative Adhesion		Application Ideas	Adhesive Transfer Tape Equivalent
				Minutes Hours	Days Weeks		HSE	LSE		
300 High Tack	976	2.0 (0.05)	• High tack • Excellent adhesion to most plastics	250°F (121°C)	150°F (66°C)	Med.	High	High	Attach fabric swatches in sample books.	927
	969	5.0 (0.13)							Assemble point-of-purchase displays. Bond trim strips to furniture or luggage. Bond labels to plastic toys. Attach gaskets or foams.	950
350 High Performance	926	5.0 (0.13)	• High performance • Excellent temperature and solvent resistance	450°F (232°C)	300°F (149°C)	High	High	High	Bond fabric or trim to window blinds. Splice aluminum coils. Bond foam insulation. Mount nameplates on award plaques.	9485PC
400 General Purpose	970XL	1.0 (0.025)	• General purpose • Excellent adhesion to most paper stocks	250°F (121°C)	180°F (82°C)	Med.	Med.	Low	Attach photos to layouts. Attach labels.	920XL
	924	2.0 (0.05)							Seal pocket in folders. Bond mat board in picture frames. Splice paper, films, foils. General purpose bindery attaching.	465
	987*	1.7 (0.040)								9498
400/1000 Repositional	928	2.0 (0.05)	• Differential tack • Repositionable	180°F (82°C)	150°F (66°C)	Med.	High/Low	Low/Low	Attach credit card in mailer. Core start/end tab paper, films and foils. Attach temporary labels.	9416

Note: The technical information and data provided here should be considered representative or typical only and should not be used for specification purposes. User should evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for user's method of application.

Relative Adhesion: HSE – High Surface Energy, LSE – Low Surface Energy

\* 3M brand